


U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE  <b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>		ATTORNEY'S DOCKET NUMBER 1454.1125  <b>10/019016</b>
INTERNATIONAL APPLICATION NO. PCT/EP00/05917	INTERNATIONAL FILING DATE 26 June 2000	PRIORITY DATE CLAIMED 25 June 1999
TITLE OF INVENTION METHOD AND DEVICE FOR INPUTTING CONTROL INFORMATION IN COMPUTER SYSTEMS		
APPLICANT(S) FOR DO/EO/US Gerhard BOCK et al.		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:		
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input checked="" type="checkbox"/> This is an express request to immediately begin national examination procedures (35 U.S.C. 371(f)).</li> <li>3. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).</li> <li>4. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>5. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>6. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>7. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>8. <input type="checkbox"/> An oath or declaration of the inventor (35 U.S.C. 371(c)(4)).</li> <li>9. <input checked="" type="checkbox"/> A translation of the Annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>		
Items 10-15 below concern document(s) or information included:		
<ol style="list-style-type: none"> <li>10. <input checked="" type="checkbox"/> An Information Disclosure Statement Under 37 CFR 1.97 and 1.98.</li> <li>11. <input type="checkbox"/> An assignment document for recording.            Please mail the recorded assignment document to:           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> the person whose signature, name &amp; address appears at the bottom of this document.</li> <li>b. <input type="checkbox"/> the following:</li> </ol> </li> <li>12. <input checked="" type="checkbox"/> A preliminary amendment.</li> <li>13. <input checked="" type="checkbox"/> A substitute specification</li> <li>14. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>15. <input checked="" type="checkbox"/> Other items or information: <u>First page of published International Application with translation; International Preliminary Examination Report; International Search Report.</u></li> </ol>		

<input checked="" type="checkbox"/> The U.S. National Fee (35 U.S.C. 371(c)(1)) and other fees as follows:					
CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	35 -20=	15	x \$ 18.00	270.00
	INDEPENDENT CLAIMS	3 -3=	0	x \$ 84.00	0.00
	MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+\$280.00	0.00
	BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(4): <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....\$1,040 <input checked="" type="checkbox"/> International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$ 890 <input type="checkbox"/> International preliminary examination fee (37 C.F.R. 1.482) not paid to USPTO but international search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO...\$ 740 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provision of PCT Article 33(1)-(4).....\$ 710 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2) to (4) .....\$ 100				890.00
	Surcharge of \$130 for furnishing the National fee or oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 mos. from the earliest claimed priority date (37 CFR 1.482(e)).				0.00
	TOTAL OF ABOVE CALCULATIONS				1160.00
	Reduction by 1/2 for filing by small entity, if applicable. Affidavit must be filed also. (Note 37 CFR 1.9, 1.27, 1.28.)				
	SUBTOTAL				1160.00
	Processing fee of \$130 for furnishing the English Translation later than [ ] 20 [ ] 30 mos. from the earliest claimed priority date (37 CFR 1.482(f)).				
	TOTAL NATIONAL FEE				1160.00
	Fee for recording the enclosed assignment (37 CFR 1.21(h)).				+
	TOTAL FEES ENCLOSED				1160.00
a. <input checked="" type="checkbox"/> A check in the amount of \$1160.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 19-3935 in the Amount of \$ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, credit any overpayment to Deposit Account No. 19-3935. A duplicate copy of this sheet is enclosed. or					
 21171 PATENT TRADEMARK OFFICE					
SUBMITTED BY: STAAS & HALSEY LLP					
Type Name	Mark J. Henry			Reg. No.	36,162
Signature				Date	

Docket No.: 1454.1125

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Application of:

PCT National Phase of: PCT/EP00/05917

Gerhard BOCK et al.

Serial No.

Group Art Unit: To be assigned

Confirmation No.

Filed: Examiner: To be assigned

For: METHOD AND DEVICE FOR INPUTTING CONTROL INFORMATION IN COMPUTER  
SYSTEMS

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Before examination of the above-identified application, please amend the application as follows:

**IN THE ABSTRACT:**

Please REPLACE the Abstract originally filed with the enclosed Substitute Abstract attached hereto.

**IN THE SPECIFICATION:**

Please REPLACE the specification originally filed with the enclosed Substitute Specification.

**IN THE CLAIMS:**

Please CANCEL claims 1-17.

Please ADD new claims 18-52 in accordance with the following:

18. (NEW) An input device for computer systems, comprising:

a recording unit to serially record image information;

an image evaluation unit to evaluate the recorded image information and determine control information from a relative displacement of the serially recorded image information, the image evaluation unit having an image compression device for generating motion vectors, the control information being a main motion vector of the serially recorded image information

a data processing unit to process the control information in selection information ; and

a display unit to display the selection information .

19. (NEW) The input device as claimed in claim 18, wherein the selection information in a displayed image is at least one of a selection position, a selection field and an entire display area of the display unit .

20. (NEW) The input device as claimed in claim 18, wherein the control information has an x component, wherein the image evaluation unit takes into account a parallel relative displacement of the image information in the x direction.

21. (NEW) The input device as claimed in claim 18, wherein the control information has a y component, wherein the image evaluation unit takes into account a parallel relative displacement of the image information in the y direction.

22. (NEW) The input device as claimed in claim 18, wherein the control information has a z component, wherein the image evaluation unit takes into account a concentric relative displacement of the image information in the x and y directions.

23. (NEW) The input device as claimed in claim 22, wherein the recording unit has a displacement device for creating the parallel and/or concentric relative displacement.

24. (NEW) The input device as claimed in claim 22, wherein the display unit enlarges or reduces the selection information depending on the z component of the control information.

25. (NEW) The input device as claimed in claim 18, wherein the computer system is a

mobile multimedia communication terminal.

26. (NEW) The input device as claimed in claim 25, wherein the recording unit records in the display direction of the display unit.

27. (NEW) The input device as claimed in claim 25, wherein the recording unit records in the opposite direction to the display direction of the display unit.

28. (NEW) The input device as claimed in claim 25, further comprising at least one further recording unit which records in the opposite direction to the display direction of the display unit.

29. (NEW) The input device as claimed in claim 18, wherein the recording unit has a CCD or CMOS sensor camera.

30. (NEW) The input device as claimed in claim 18, further comprising at least one activation element for activating/deactivating the input device.

31. (NEW) The input device as claimed in claim 18, wherein the recording unit is a macro camera system which can record the image information in sharp focus from a very short distance.

32. (NEW) The input device as claimed in claim 18, wherein the recording unit has a pressure sensor for confirming the displayed selection information.

33. (NEW) The input device as claimed in claim 18, wherein the computer system is a mobile videophone.

34. (NEW) The input device as claimed in claim 19, wherein the control information has an x component, wherein the image evaluation unit takes into account a parallel relative displacement of the image information in the x direction.

35. (NEW) The input device as claimed in claim 34, wherein the control information has

a y component, wherein the image evaluation unit takes into account a parallel relative displacement of the image information in the y direction.

36. (NEW) The input device as claimed in claim 35, wherein the control information has a z component, wherein the image evaluation unit takes into account a concentric relative displacement of the image information in the x and y directions.

37. (NEW) The input device as claimed in claim 36, wherein the recording unit has a displacement device for creating the parallel and/or concentric relative displacement.

38. (NEW) The input device as claimed in claim 37, wherein the display unit enlarges or reduces the selection information depending on the z component of the control information.

39. (NEW) The input device as claimed in claim 38, wherein the computer system is a mobile multimedia communication terminal.

40. (NEW) The input device as claimed in claim 39, wherein the recording unit records in the display direction of the display unit.

41. (NEW) The input device as claimed in claim 40, wherein the recording unit records in the opposite direction to the display direction of the display unit.

42. (NEW) The input device as claimed in claim 41, further comprising at least one further recording unit which records in the opposite direction to the display direction of the display unit.

43. (NEW) The input device as claimed in claim 42, wherein the recording unit has a CCD or CMOS sensor camera.

44. (NEW) The input device as claimed in claim 43, further comprising at least one activation element for activating/deactivating the input device.

45. (NEW) The input device as claimed in claim 44, wherein the recording unit is a

macro camera system which can record the image information in sharp focus from a very short distance.

46. (NEW) The input device as claimed in claim 45, wherein the recording unit has a pressure sensor for confirming the displayed selection information.

47. (NEW) The input device as claimed in claim 46, wherein the computer system is a mobile videophone.

48. (NEW) A method for inputting control information in a computer system comprising the steps:

- a) recording first image information;
- b) recording second image information;
- c) determining a relative displacement between the first and second image information; and
- d) generating the control information on the basis of the relative displacement determined,

wherein the determination in step c) is a determination of motion vectors by means of an image compression method; and the generation according to step d) is a generation of control information on the basis of a main motion vector.

49. (NEW) A input device comprising:

- a recorder to record an image at first and second image positions;
- an image evaluation unit to determine the displacement of the image between the first and second positions and to obtain a motion vector from the displacement;
- a display unit to display information; and
- a data processing unit to modify the information displayed on the display unit based on the motion vector.

50. (NEW) An input unit according to claim 49, wherein the data processing unit moves a cursor on the display based on the motion vector.

51. (NEW) An input unit according to claim 49, wherein the data processing unit scrolls

through the information displayed based on the motion vector.

52. (NEW) An input unit according to claim 49, wherein the data processing unit zooms into and out of the information displayed based on the motion vector such that if the second image position is further from the recorder than the first image position, then the data processing unit zooms out of the information displayed, and if the second image position is closer to the recorder than the first image position, then the data processing unit zooms into the information displayed.

#### REMARKS

This Preliminary Amendment is submitted to improve the form of the specification as originally-filed. A substitute specification and marked-up copy of the original specification are enclosed. No new matter is added to these documents.

It is respectfully requested that this Preliminary Amendment be entered in the above-referenced application.

If any further fees are required in connection with the filing of this Preliminary Amendment, please charge same to our Deposit Account No. 19-3935.

Respectfully submitted,

STAAS & HALSEY LLP

Date: Dec. 26, 2001

By: Mark J. Henry  
Mark J. Henry  
Registration No. 36,162

700 Eleventh Street, NW, Suite 500  
Washington, D.C. 20001  
(202) 434-1500



## SUBSTITUTE ABSTRACT

The invention relates to an input device for computer systems and to a pertaining method with a recording unit for serially recording image information. An image evaluation unit evaluates a relative displacement of the serially recorded image information, wherein a data processing unit displaces selection information displayed on a display unit on the basis of the determined control information.

44.34

04-05-2001 1999P02126WO

PCT/EP00/05917

- 1 -

Description

Method and device for inputting control information in computer systems

5

The invention relates to a method and a device for inputting control information in computer systems, and in particular to an input device and a pertaining method for operating a mobile multimedia communication terminal (mobile videophone).

10

Mobile communication terminals such as mobile phones for example increasingly have access to "online services". In particular the introduction of the future broadband UMTS mobile communication network will enable high-quality mobile Internet access.

15

Likewise, ultra-small computer systems (such as palmtop computers for example) on which a wide variety of organizer functions (such as address management, diary, task list, etc. for example) are implemented are becoming increasingly important.

20

The operation of these display-driven computer systems requires an input device with which the information displayed on a display unit can be controlled or selected.

Mobile ultra-small computer systems of this type usually have so-called "touch screens" as an input device, wherein the display unit is equipped with a touch-sensitive layer and it is accordingly possible either to input control information or select the displayed information by means of an additional input stylus. The disadvantage of such conventional input devices however is that the additional input stylus has to be accommodated in the device and consequently may get lost. Moreover,

30

- 2 -

user interfaces for these conventional "touch-screen" display units are mechanically not very robust.

So-called conventional "mouse" input devices are also known, wherein a rolling ball is converted into a corresponding electrical signal which is displayed as a pointer symbol or selection information on a display unit. In addition, control keys can be used as an input device for computer systems.

Particularly in the case of ultra-small computer systems however, input devices of this type are not possible because of the greater amount of space required.

As an alternative to the touch-controlled input devices described above, so-called non-contact input devices are known in which, for example, a video camera records a position of an input stylus, evaluates it, and on the basis of the evaluation a pointer symbol or selection information displayed on the display unit is subsequently displaced (e.g. US 5,726,685). Furthermore, a so-called gesture input device is known from the publication US 5,617,312 in which the gestures of a person are recorded by a camera and are subsequently converted into corresponding control signals for controlling a pointer symbol or selection information displayed on the display unit. However, since said input devices are based on relatively complex pattern recognition, they are usually prone to errors and require large amounts of computing power.

Known from the publication EP-A-773 494 forming the preamble of claim 1 is an input device for computer systems having a recording unit for serially recording image information; an image evaluation unit for evaluating the recorded image information and determining

control information; a data processing unit for processing the control information in selection information; and a display unit for displaying the selection information. The image evaluation unit determines the control information from a relative displacement of the serially recorded image information.

A device and a method for controlling a display is also known from publication JP 10 240 436 A, in which a picture or menu displayed on the display is displaced vertically or horizontally respectively depending on a relative movement or displacement of a CCD camera.

In contrast, the object of the invention is to create an input device and a pertaining method for computer systems which is space-saving, cost-effective and reliable.

According to the invention, this object is achieved by the features of claim 1 with respect to the device and by the measures of claim 17 with respect to the method.

Particularly on mobile videophones, the use of an image evaluation unit in particular, which uses an image compression device for generating motion vectors, with the control information being derived from a main motion vector, enables the recording unit already present as well as the associated image compression method to be used simultaneously as an input device.

Respective parallel displacement components of the image information in the x and y directions are preferably used to generate the x and y components of the control information, which enables control of a pointer symbol or

Art. 34

- 3A -

selection information to be realized on a two-dimensional display.  
The control information may however also have a z component which  
is produced from a concentric displacement of the image  
information in the x and y directions, which enables control of a  
5 pointer symbol or selection information to be realized on a three-  
dimensional or quasi three-dimensional display. In addition, this  
enables an intuitive enlargement or reduction of the display  
scale. To produce such a concentric displacement of image  
information for three-dimensional input, the recording unit can  
10 preferably have a zoom function unit.

- > 4

A mobile multimedia communication terminal is preferably used as the computer system, with the recording unit in a mobile videophone being used both for recording a call partner and as an input device. Analogously, a display unit is used both for displaying a call partner and for displaying an Internet page, organizer page, etc. An extremely cost-effective and space-saving realization of the input device is thus achieved. The recording unit comprises in particular a CCD or CMOS sensor camera, which reduces the space requirement still further.

10           The recording unit preferably records image information for input control in the display direction of the display unit, but it can also record image information in the opposite direction. This is particularly advantageous when the input device is provided in a mobile videophone, because when the videophone is placed on a suitable surface, by moving the videophone to and fro, an associated pointer symbol can be correspondingly displaced on the display unit in the same way as with a conventional mouse input device.

20           The recording unit preferably has a macro camera system for recording image information from a very close distance, which enables, for example, an input to be made by placing a finger directly on the recording unit. If the recording unit additionally has a pressure sensor for confirming displayed selection information, then the input device can be operated in the same way as a conventional touch-screen input device.

25           Further advantageous embodiments of the invention are characterized in the subclaims.

The invention is described in greater detail below on the basis of exemplary embodiments and with reference to the drawing, in which:

- Figure 1 shows a schematic diagram of the input device  
5 according to the invention;
- Figure 2 shows a schematic diagram of serially recorded image information to illustrate three-dimensional control;
- Figures 3a and 3b show schematic diagrams of a mobile communication terminal having an input device  
10 according to a first exemplary embodiment;
- Figure 4 shows a schematic diagram of a mobile communication terminal having an input device according to a second exemplary embodiment; and
- Figures 5a to 5c show schematic diagrams of parts of a mobile communication terminal having an input device  
15 according to a third exemplary embodiment.

Figure 1 shows a schematic diagram of an input device according to the invention. In Figure 1, reference numeral 1 denotes a recording unit for serially recording image information, wherein first image information A essentially comprises a  
20 landscape with a house, two trees and an industrial building. After swiveling the recording unit 1 in the negative y direction, second image information A' is recorded, which essentially comprises the house, the tree and the industrial building of the first image information A plus an additional fence. Owing to the  
25 swiveling of the recording unit 1, the additional tree present in the first image information A is not present in the second image information A'.

An image evaluation unit 3 (AW) serves to evaluate the serially recorded first and second image information A and A', with control information x, y and z being determined. Evaluation of the image evaluation unit 3 is essentially based here on  
5 determining a relative displacement between the serially recorded image information, i.e. between the first image information A and the second image information A'. To be more precise, a main displacement vector HV which corresponds to a displacement of the main image components within image information A and A' is  
10 determined.

Given the swiveling of the recording unit 1 in the y direction illustrated in Figure 1, when the image information A and A' is evaluated in the evaluation unit 3, the main displacement vector HV is accordingly determined, which  
15 essentially represents a displacement in the y direction. The control information in the y direction thus obtained is subsequently processed in a data processing unit 4 (DV) in such a way that a display unit 2 connected to the data processing unit 4 causes a corresponding displacement of selection information P  
20 displayed on the display unit 2 to P'. In Figure 1, the selection information displayed on the display unit 2 is a pointer symbol P, which is located in an upper position for a first camera position for recording the first image information A, and moves to a lower position (P') when the recording unit 1 is swiveled to record the  
25 second image information A'.

In accordance with Figure 1, therefore, a relative displacement of serially recorded image information can be produced and evaluated by swiveling a recording unit 1, which information produces a displacement of the displayed pointer  
30 symbols P to P' on the display unit 2.



The relative displacement is determined here on the basis of the principal structures of image information A and A'. To be more precise, the relative displacement is not determined on the basis of micro displacements, but rather on the basis of macro displacements in the image information A and A'. Macro displacements are understood to be, for example, displacements of the general background of the image information A and A', while micro displacements are displacements of limited image areas as a result of quick and instantaneous movements. Accordingly, a car moving through the landscape illustrated in Figure 1 would not cause a macro displacement, but only a micro displacement of image information which is ignored by the input device.

According to the invention, only macro displacements of the recorded image information are taken into account for the inputting of control information or the control of selection information P and P' displayed on the display unit 2, with a threshold decision element (not shown) setting an absolute magnitude for the macro displacement. Accordingly, a macro displacement is taken into account by the evaluation unit 3 if, for example, at least 90% of the image information recorded by the recording unit 1 exhibits the same or a similar displacement. A parallel displacement in essentially the same x and y direction is interpreted here as the same displacement, while a displacement in the z direction is interpreted as a similar displacement.

Figure 2 shows a schematic diagram for illustrating a relative displacement of image information in a z direction. According to Figure 2, the image information recorded by the recording unit 1 comprises a house which is initially at a distance (image information A) and the same house which, as a result of coming closer in the z direction, is displayed as enlarged by the image information A'.



displacement vectors are not ordered parallel to one another in the x or y direction, but exhibit a concentric displacement direction. Such concentrically oriented displacement vectors can therefore be evaluated by the evaluation unit 3 as control  
5 information in the z direction, thus enabling even three-dimensional control of the selection information displayed on the display unit 2, i.e. pointer symbols P and P'. The display unit 2 may also be a three-dimensional display unit here (e.g. holographic display unit).

10 As an alternative to moving the recording unit 1 in the z direction, i.e. moving closer to the object to be recorded, the recording unit 1 can also have an (electronic or mechanical) zoom function unit (not shown) with which it is likewise also possible to perform a concentric displacement of the image information. The  
15 recording unit 1 may also have a rotating or swiveling unit (not shown) with which the macro displacements in the x and y directions can be realized.

Figures 3a and 3b show schematic diagrams of a mobile multimedia communication terminal having the input device  
20 according to a first exemplary embodiment of the invention. In Figure 3a, MM denotes a mobile multimedia communication terminal, as may be realized for example in the form of a mobile videophone with Internet access. In addition to the usual function units, the mobile multimedia communication terminal MM essentially has a  
25 recording unit 1, a display unit 2 and an activation button T for activating/deactivating the input device. In the case of an Internet access, the enlarged Internet page IS (web page) is displayed on the display unit 2 for example, with a pointer symbol P being displayed as selection information at the position I. To  
30 move the pointer symbol P from position I to position II, according to Figure 3b a user can, for example, move the mobile multimedia communication terminal MM downward in front of his face, with the result that, instead of image information A at position I, the image information A' at position II is now  
35 recorded by the recording unit 1. The resulting macro displacements are detected by the evaluation unit 3, as described above, and are processed by the data processing unit 4 in such a way that the display unit 2 now displays the pointer P' at

position II of the displayed Internet page IS. A displacement of the pointer symbol P showing the selection information to P' is thus achieved in this way by displacing the recording unit 1 relative to the recorded background.

5           As was already described above, it is also possible to perform a swiveling instead of the vertical displacement of the mobile multimedia communication terminal from a position I to a position II, which enables the pointer symbol P to be displaced in the same manner to position II for the pointer symbol P'.

10           Mobile multimedia communication terminals, as illustrated by way of example in Figures 3a and 3b, are especially advantageous if they are equipped as mobile videophones. Mobile videophones already have a large display unit 2 as well as a recording unit 1 for recording image information. Moreover, such  
15 mobile videophones already have an image compression device as image evaluation unit 3 for compressing the recorded image information. The algorithms used for image compression detect a movement in the image information A and A', with the movement of the total image information being calculated in such a way to  
20 produce a total or main motion vector which is equivalent to the movement or displacement of the mobile multimedia communication terminal MM or the associated image information A and A' respectively. This total or main motion vector, which can be readily calculated during image compression, can now be processed  
25 as

control information with corresponding x, y and z components, and displace the selection information, i.e. the pointer symbols P or P', accordingly. Since the compression algorithms used are  
30 essentially already present in a mobile videophone, no additional costs are incurred. To switch over or activate/deactivate the input device, the mobile videophone or mobile multimedia communication terminal MM requires only an activation button T.

Figure 4 shows a schematic diagram of a mobile multimedia  
35 communication terminal having an input device according to a second exemplary embodiment. In Figure 4 the same reference symbols denote the same or corresponding components as in

Figures 3a and 3b, so a detailed description is dispensed with below.

On a mobile multimedia communication terminal MM having an input device according to the second exemplary embodiment, the display unit 2 does not display the complete Internet page IS, but only a selected section F. This way of displaying of information, for example from the Internet or from another application, has the advantage that the information on the displayed page IS is more readily legible for the user.

According to the present invention, the input device now has intuitive control of the information page IS to be displayed. To be more precise, a user need only displace the mobile multimedia communication terminal with the recording unit 1 in the x and y directions in order to reach the respective sections of the information page IS, so that the information page IS can be read intuitively (i.e. by displacing a viewing window) without using any further keys or input media.

In addition, a displacement in the z direction, i.e. a forward/backward movement of the mobile multimedia communication terminal MM, can enlarge or reduce the size of the selected section F, which enables intuitive use comparable to the use of a magnifying glass.

According to Figures 3 and 4, the recording unit 1 is located on the front of the mobile multimedia communication terminal MM. It can however also be located on the rear of the terminal, or a second recording unit may be arranged on the rear of the mobile multimedia communication terminal MM. Given suitable realization of the optics, i.e. the ability to focus the recording unit 1 even at a very short distance, the mobile multimedia communication terminal MM can also be placed rear down on a suitably structured surface and the whole unit can be displaced in the same way as a mouse. The recording unit located on the rear detects here, as described above, the relative movement or relative displacement of the recorded image information (structured surface) and determines from it the corresponding control information for controlling the selection information, i.e. a pointer symbol P or a display section F of the information page IS. This results in the input device being particularly easy to operate, since it essentially corresponds to a conventional mouse input device. In this case the mobile multimedia communication terminal preferably has the selection buttons (not shown) known from conventional mouse input devices.

Figures 5a to 5c show enlarged partial views of a mobile multimedia communication terminal MM having an input device according to a third exemplary embodiment. In Figures 5a to 5c, the same reference symbols denote the same components as in Figures 1 to 4, so a detailed description is dispensed with below.

According to Figures 5a to 5c, the input device according to the third exemplary embodiment can be used in the same way as a conventional so-called "touch-pad" input device. In Figure 5a, reference numeral 1 again denotes a recording unit 1, but one which is a special macro camera system. To be more precise, the recording unit 1 according to Figures 5a to 5c is able to record very fine structures in the immediate vicinity of the camera, by

means of which, for example, the finger lines of a finger placed directly on the recording unit are recorded in sharp focus.

According to Figures 5a to 5c, the display unit 2 shows a telephone directory list with a plurality of names and corresponding phone numbers. The telephone directory list displayed on the display unit 2 thus corresponds to an information page IS, with the selection information being represented neither by a pointer symbol P for indicating a selection position, nor by a display area F, but by a predetermined selection field B in the form of a, for example, colored bar. To control the input, or to select the name Meier with phone number 345678, the user then places his finger on the recording unit 1, with the input device activated by means of the activation button T (not shown). According to Figure 5b, the finger lines are now recorded as image information A, and the user moves his finger downward to displace the bar B. Figure 5c shows here a partial view of the mobile multimedia communication terminal MM, with the finger shown at a lower position. The recording unit 1 accordingly detected a displacement of the recorded image information A A' on the basis of the finger lines and evaluated this as a vertical displacement downward. The evaluation unit 3 accordingly outputs corresponding control information to the data processing unit 4, which results in the bar B being displaced downward on the display unit 2 and now highlighting the desired name Meier with phone number 345678.

To select the desired name, according to the third exemplary embodiment the input device can also have a pressure sensor for confirming the displayed selection information, i.e. the name highlighted by the bar B, which dispenses with the need for further fixed keys or so-called menu-driven "soft keys".

Given suitable dimensioning of the recording unit 1 and the evaluation unit 3, in this way it is also possible to make an input in a way known from conventional "touch pads" and/or "touch screens" for example. The integration of a pressure sensor in the recording unit 1 further reduces the space required for the input device and enhances ease of operation. In comparison with conventional "touch pads" in particular, with the input device according to the third exemplary embodiment, it is not the main focus of a surface area which is determined, but rather the exact

position or movement of the finger is tracked on the basis of the lines present on it. The precision of this input device is therefore much greater than that of conventional input devices. With the input device according to the third exemplary embodiment, 5 therefore, essentially a relative macro displacement of the recorded image information is also used to control selection information.

A CCD or CMOS sensor camera is preferably used as the recording unit 1. The recording unit 1 is located here either on 10 the front or on the rear of an input or computer system respectively, but it is not limited thereto and may also be arranged at a different position and be moved around, for example by means of mirrors, in the same or opposite direction to the display direction of the display unit 2.

15



The invention was described above with reference to a mobile multimedia communication terminal. It is however not limited thereto, and likewise encompasses ultra-small computer systems without a communication link, such as palmtop computers  
5 for example. Likewise, the present invention may also be used on corded telecommunication terminals and other computer systems.

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
22

- 1 -

## Patent Claims

1. An input device for computer systems having:  
a recording unit (1) for serially recording image information (A,  
5 A');  
an image evaluation unit (3) for evaluating the recorded image  
information (A, A') and determining control information (x, y, z);  
a data processing unit (4) for processing the control information  
(x, y, z) in selection information (P; B; F); and  
10 a display unit (2) for displaying the selection information (P; B;  
F), in which  
the image evaluation unit (3) determines the control information  
(x, y, z) from a relative displacement of the serially recorded  
image information (A, A'),  
15 characterized in that the image evaluation unit (3) has an image  
compression device for generating motion vectors, wherein the  
control information is a main motion vector (x, y, z) of the  
serially recorded image information (A, A').
2. The input device as claimed in claim 1, characterized in  
20 that the selection information in a displayed image (IS) is a  
selection position (P), a selection field (B) and/or an entire  
display area (F) of the display unit (2).
3. The input device as claimed in claim 1 or 2,  
characterized in that the control information has an x component,  
25 wherein the image evaluation unit (3) essentially takes into  
account a parallel relative displacement of the image information  
(A, A') in the x direction.
4. The input device as claimed in one of claims 1 to 3,  
characterized in that the

30

- 2 -

control information has a y component, wherein the image evaluation unit (3) essentially takes into account a parallel relative displacement of the image information (A, A') in the y direction.

5 5. The input device as claimed in one of claims 1 to 4, characterized in that the control information has a z component, wherein the image evaluation unit (3) essentially takes into account a concentric relative displacement of the image information (A, A') in the x and y directions.

10 6. The input device as claimed in claim 5, characterized in that the recording unit (1) has a displacement device for creating the parallel and/or concentric relative displacement.

7. The input device as claimed in claim 5 or 6, characterized in that the display unit (2) enlarges or reduces the selection information (F) depending on the z component of the control information.

8. The input device as claimed in one of claims 1 to 7, characterized in that the computer system is a mobile multimedia communication terminal (MM).

20 9. The input device as claimed in claim 8, characterized in that the recording unit (1) records in the display direction of the display unit (2).

10. The input device as claimed in one of claims 8 or 9, characterized in that the recording unit (1) records in the opposite direction to the display direction of the display unit (2).

11. The input device as claimed in claim 8 or 9, characterized by at least one further recording unit which records in the opposite direction to the display direction of the display unit (2).

5 12. The input device as claimed in one of claims 1 to 11, characterized in that the recording unit has a CCD or CMOS sensor camera.

13. The input device as claimed in one of claims 1 to 12, characterized by at least one activation element (T) for  
10 activating/deactivating the input device.

14. The input device as claimed in one of claims 1 to 13, characterized in that the recording unit (1) is a macro camera system which can record the image information (A, A') in sharp focus from a very short distance.

15 15. The input device as claimed in one of claims 1 to 14, characterized in that the recording unit (1) has a pressure sensor for confirming the displayed selection information (P, B, F).

16. The input device as claimed in one of claims 1 to 15, characterized in that the computer system is a mobile videophone.

20 17. A method for inputting control information in a computer system comprising the steps:

a) recording first image information (A);

b) recording second image information (A');

c) determining a relative displacement between the first and

25 second image information; and

d) generating the control information (x, y, z) on  
the basis of the relative displacement determined,  
characterized in that the determination in step c) is a  
determination of motion vectors by means of an image compression  
5 method; and the generation according to step d) is a generation of  
control information (x, y, z) on the basis of a main motion  
vector.

Abstract

Method and device for inputting control information in computer systems

The invention relates to an input device for computer systems and to a pertaining method with a recording unit (1) for serially recording image information (A, A'). An image evaluation unit (3) evaluates a relative displacement of the serially recorded image information (A, A'), wherein a data processing unit (4) displaces selection information (P) displayed on a display unit (2) on the basis of the determined control information.

Figure 1

FIG. 1 is a block diagram of the input device according to the invention. It shows a recording unit (1) which is connected to a display unit (2) via a data processing unit (4). The recording unit (1) is also connected to an image evaluation unit (3). The image evaluation unit (3) is connected to the data processing unit (4). The data processing unit (4) is connected to the display unit (2). The display unit (2) displays selection information (P). The recording unit (1) records image information (A, A'). The image evaluation unit (3) evaluates a relative displacement of the serially recorded image information (A, A'). The data processing unit (4) displaces the selection information (P) on the basis of the determined control information.

1/4

FIG 1




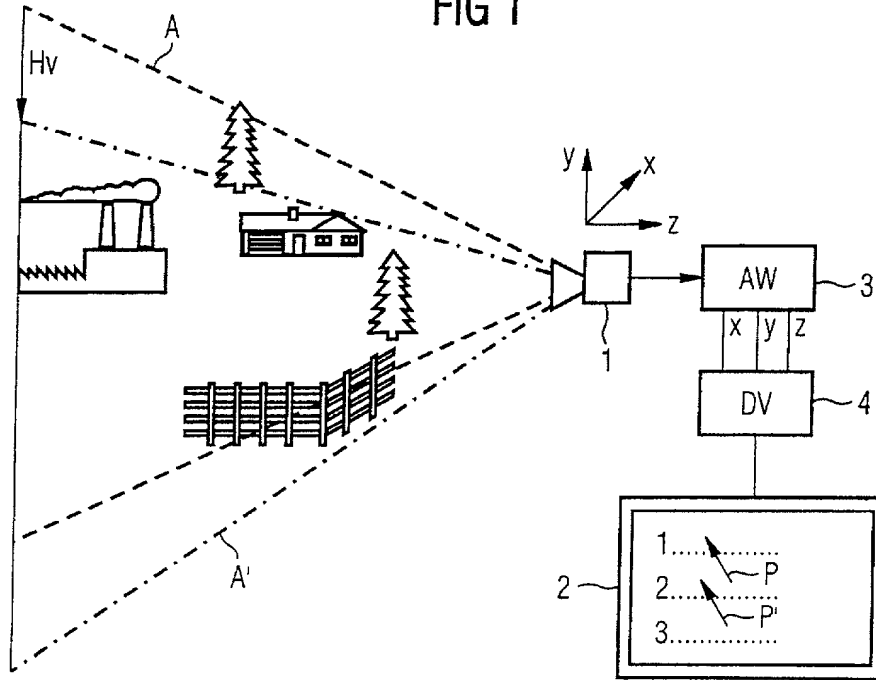


FIG 2



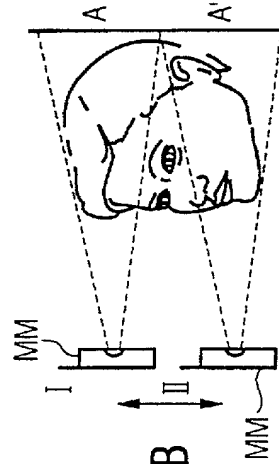

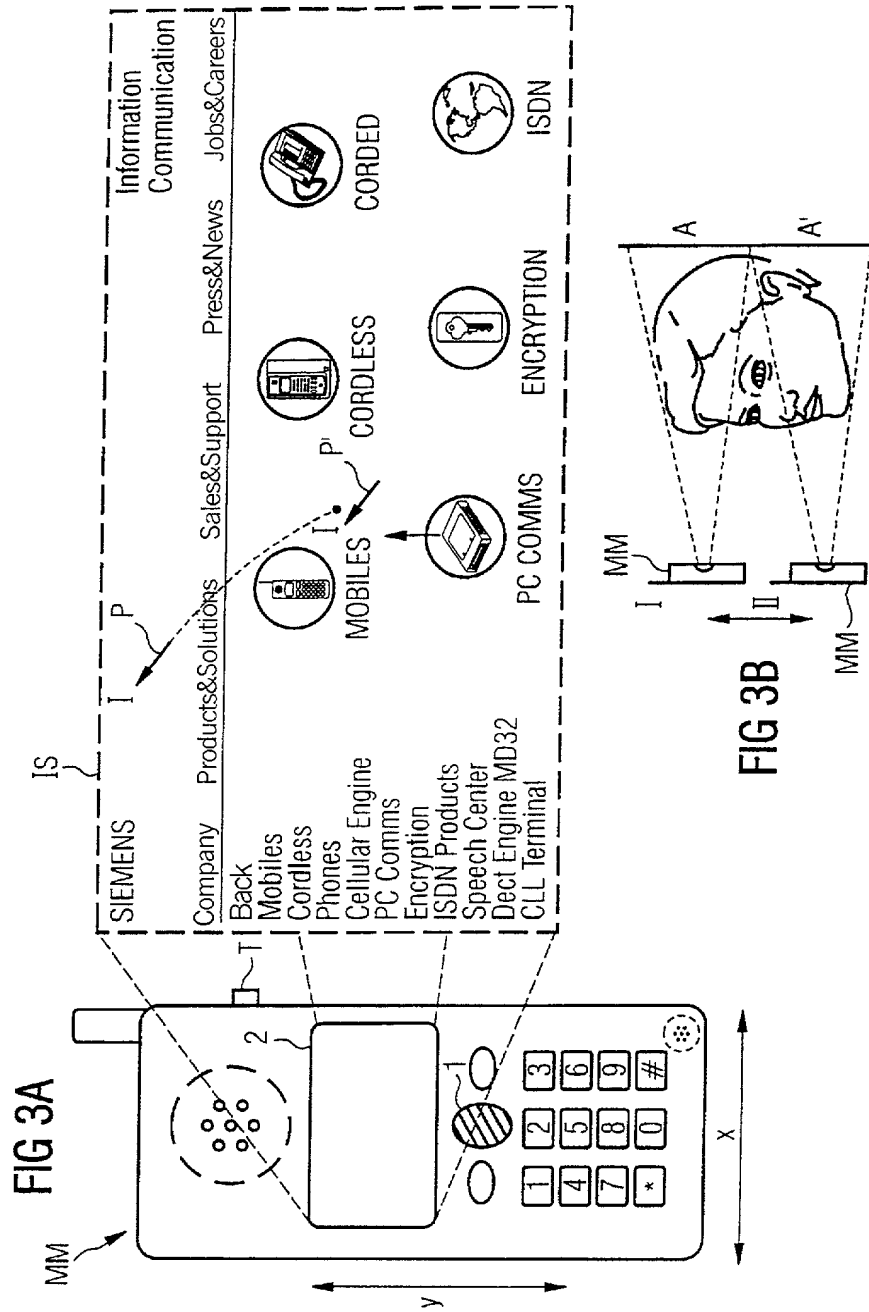

Int  
Co

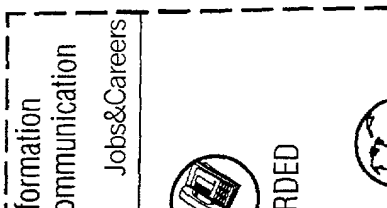


FIG 5A

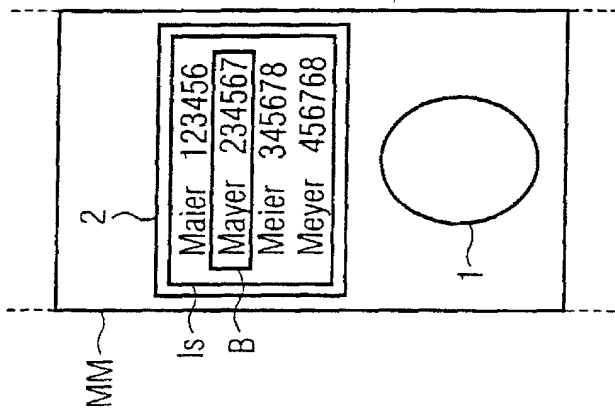


FIG 5B


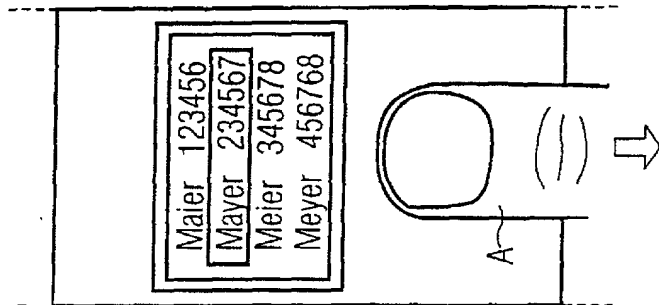


FIG 5C

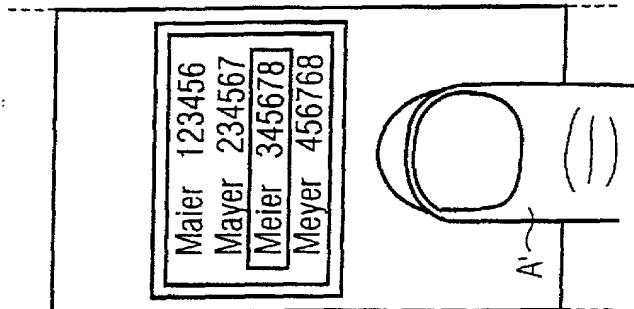

## SUBSTITUTE SPECIFICATION

### TITLE OF THE INVENTION

#### METHOD AND DEVICE FOR INPUTTING CONTROL INFORMATION IN COMPUTER SYSTEMS

[0001] This application is based on and hereby claims priority to PCT Application No. PCT/EP00/05917 filed on June 26, 2000, and European Application No. 99112287.0 filed June 25, 1999 in Europe, the contents of which are hereby incorporated by reference.

### BACKGROUND OF THE INVENTION

[0002] The invention relates to a method and a device for inputting control information in computer systems, and in particular to an input device and a pertaining method for operating a mobile multimedia communication terminal (mobile videophone).

[0003] Mobile communication terminals such as mobile phones for example increasingly have access to "online services". In particular the introduction of the future broadband UMTS mobile communication network will enable high-quality mobile Internet access.

[0004] Likewise, ultra-small computer systems (such as palmtop computers for example) on which a wide variety of organizer functions (such as address management, diary, task list, etc. for example) are implemented are becoming increasingly important.

[0005] The operation of these display-driven computer systems requires an input device with which the information displayed on a display unit can be controlled or selected.

[0006] Mobile ultra-small computer systems of this type usually have so-called "touch screens" as an input device, wherein the display unit is equipped with a touch-sensitive layer and it is accordingly possible either to input control information or select the displayed information by an additional input stylus. The disadvantage of such input devices however is that the additional input stylus has to be accommodated in the device and consequently may get lost. Moreover, user interfaces for these "touch-screen" display units are mechanically not very robust.

[0007] So-called "mouse" input devices are also known, wherein a rolling ball is converted into a corresponding electrical signal which is displayed as a pointer symbol or selection information on a display unit. In addition, control keys can be used as an input device for computer systems.

[0008] Particularly in the case of ultra-small computer systems however, input devices of this type are not possible because of the greater amount of space required.

[0009] As an alternative to the touch-controlled input devices described above, so-called non-contact input devices are known in which, for example, a video camera records a position of an input stylus, evaluates it, and on the basis of the evaluation a pointer symbol or selection information displayed on the display unit is subsequently displaced (e.g. US 5,726,685). Furthermore, a so-called gesture input device is known from the publication US 5,617,312 in which the gestures of a person are recorded by a camera and are subsequently converted into corresponding control signals for controlling a pointer symbol or selection information displayed on the display unit. However, since said input devices are based on relatively complex pattern recognition, they are usually prone to errors and require large amounts of computing power.

[0010] Known from the publication EP-A-773 494 is an input device for computer systems having a recording unit for serially recording image information; an image evaluation unit for evaluating the recorded image information and determining control information; a data processing unit for processing the control information in selection information; and a display unit for displaying the selection information. The image evaluation unit determines the control information from a relative displacement of the serially recorded image information.

[0011] A device and a method for controlling a display is also known from publication JP 10 240 436 A, in which a picture or menu displayed on the display is displaced vertically or horizontally respectively depending on a relative movement or displacement of a CCD camera.

#### SUMMARY OF THE INVENTION

[0012] In contrast, one possible object of the invention is to create an input device and a pertaining method for computer systems which is space-saving, cost-effective and reliable.

[0013] Particularly on mobile videophones, the use of an image evaluation unit in particular, which uses an image compression device for generating motion vectors, with the control information being derived from a main motion vector, enables the recording unit already present as well as the associated image compression method to be used simultaneously as an input device.

[0014] Respective parallel displacement components of the image information in the x and y directions are preferably used to generate the x and y components of the control information, which enables control of a pointer symbol or selection information to be realized on a two-

dimensional display. The control information may however also have a z component which is produced from a concentric displacement of the image information in the x and y directions, which enables control of a pointer symbol or selection information to be realized on a three-dimensional or quasi three-dimensional display. In addition, this enables an intuitive enlargement or reduction of the display scale. To produce such a concentric displacement of image information for three-dimensional input, the recording unit can preferably have a zoom function unit.

**[0015]** A mobile multimedia communication terminal is preferably used as the computer system, with the recording unit in a mobile videophone being used both for recording a call partner and as an input device. Analogously, a display unit is used both for displaying a call partner and for displaying an Internet page, organizer page, etc. An extremely cost-effective and space-saving realization of the input device is thus achieved. The recording unit comprises in particular a CCD or CMOS sensor camera, which reduces the space requirement still further.

**[0016]** The recording unit preferably records image information for input control in the display direction of the display unit, but it can also record image information in the opposite direction. This is particularly advantageous when the input device is provided in a mobile videophone, because when the videophone is placed on a suitable surface, by moving the videophone to and fro, an associated pointer symbol can be correspondingly displaced on the display unit in the same way as with a mouse input device.

**[0017]** The recording unit preferably has a macro camera system for recording image information from a very close distance, which enables, for example, an input to be made by placing a finger directly on the recording unit. If the recording unit additionally has a pressure sensor for confirming displayed selection information, then the input device can be operated in the same way as a touch-screen input device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0018]** These and other objects and advantages of the present invention will become more apparent and more readily appreciated from the following description of the preferred embodiments, taken in conjunction with the accompanying drawings of which:

Fig. 1 shows a schematic diagram of the input device according to one aspect of the invention;

Fig. 2 shows a schematic diagram of serially recorded image information to illustrate three-dimensional control;

Figs. 3a and 3b show schematic diagrams of a mobile communication terminal having an input device according to a first exemplary embodiment;

Fig. 4 shows a schematic diagram of a mobile communication terminal having an input device according to a second exemplary embodiment; and

Figs. 5a to 5c show schematic diagrams of parts of a mobile communication terminal having an input device according to a third exemplary embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

**[0019]** Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to like elements throughout.

**[0020]** Fig. 1 shows a schematic diagram of an input device. In Fig. 1, reference numeral 1 denotes a recording unit for serially recording image information, wherein first image information A essentially comprises a landscape with a house, two trees and an industrial building. After swiveling the recording unit 1 in the negative y direction, second image information A' is recorded, which essentially comprises the house, the tree and the industrial building of the first image information A plus an additional fence. Owing to the swiveling of the recording unit 1, the additional tree present in the first image information A is not present in the second image information A'.

**[0021]** An image evaluation unit 3 (AW) serves to evaluate the serially recorded first and second image information A and A', with control information x, y and z being determined. Evaluation of the image evaluation unit 3 is essentially based here on determining a relative displacement between the serially recorded image information, i.e. between the first image information A and the second image information A'. To be more precise, a main displacement vector HV which corresponds to a displacement of the main image components within image information A and A' is determined.

**[0022]** Given the swiveling of the recording unit 1 in the y direction illustrated in Fig. 1, when the image information A and A' is evaluated in the evaluation unit 3, the main displacement vector HV is accordingly determined, which essentially represents a displacement in the y direction. The control information in the y direction thus obtained is subsequently processed in a data processing unit 4 (DV) in such a way that a display unit 2 connected to the data

processing unit 4 causes a corresponding displacement of selection information P displayed on the display unit 2 to P'. In Fig. 1, the selection information displayed on the display unit 2 is a pointer symbol P, which is located in an upper position for a first camera position for recording the first image information A, and moves to a lower position (P') when the recording unit 1 is swiveled to record the second image information A'.

**[0023]** In accordance with Fig. 1, therefore, a relative displacement of serially recorded image information can be produced and evaluated by swiveling a recording unit 1, which information produces a displacement of the displayed pointer symbols P to P' on the display unit 2.

**[0024]** The relative displacement is determined here on the basis of the principal structures of image information A and A'. To be more precise, the relative displacement is not determined on the basis of micro displacements, but rather on the basis of macro displacements in the image information A and A'. Macro displacements are understood to be, for example, displacements of the general background of the image information A and A', while micro displacements are displacements of limited image areas as a result of quick and instantaneous movements.

Accordingly, a car moving through the landscape illustrated in Fig. 1 would not cause a macro displacement, but only a micro displacement of image information which is ignored by the input device.

**[0025]** Only macro displacements of the recorded image information are taken into account for the inputting of control information or the control of selection information P and P' displayed on the display unit 2, with a threshold decision element (not shown) setting an absolute magnitude for the macro displacement. Accordingly, a macro displacement is taken into account by the evaluation unit 3 if, for example, at least 90% of the image information recorded by the recording unit 1 exhibits the same or a similar displacement. A parallel displacement in essentially the same x and y direction is interpreted here as the same displacement, while a displacement in the z direction is interpreted as a similar displacement.

**[0026]** Fig. 2 shows a schematic diagram for illustrating a relative displacement of image information in a z direction. According to Fig. 2, the image information recorded by the recording unit 1 comprises a house which is initially at a distance (image information A) and the same house which, as a result of coming closer in the z direction, is displayed as enlarged by the image information A'.

**[0027]** Accordingly, given a displacement in the z direction, the displacement vectors are not ordered parallel to one another in the x or y direction, but exhibit a concentric displacement

direction. Such concentrically oriented displacement vectors can therefore be evaluated by the evaluation unit 3 as control information in the z direction, thus enabling even three-dimensional control of the selection information displayed on the display unit 2, i.e. pointer symbols P and P'. The display unit 2 may also be a three-dimensional display unit here (e.g. holographic display unit).

**[0028]** As an alternative to moving the recording unit 1 in the z direction, i.e. moving closer to the object to be recorded, the recording unit 1 can also have an (electronic or mechanical) zoom function unit (not shown) with which it is likewise also possible to perform a concentric displacement of the image information. The recording unit 1 may also have a rotating or swiveling unit (not shown) with which the macro displacements in the x and y directions can be realized.

**[0029]** Figs. 3a and 3b show schematic diagrams of a mobile multimedia communication terminal having the input device according to a first exemplary embodiment of the invention. In Fig. 3a, MM denotes a mobile multimedia communication terminal, as may be realized for example in the form of a mobile videophone with Internet access. In addition to the usual function units, the mobile multimedia communication terminal MM essentially has a recording unit 1, a display unit 2 and an activation button T for activating/deactivating the input device. In the case of an Internet access, the enlarged Internet page IS (web page) is displayed on the display unit 2 for example, with a pointer symbol P being displayed as selection information at the position I. To move the pointer symbol P from position I to position II, according to Fig. 3b a user can, for example, move the mobile multimedia communication terminal MM downward in front of his face, with the result that, instead of image information A at position I, the image information A' at position II is now recorded by the recording unit 1. The resulting macro displacements are detected by the evaluation unit 3, as described above, and are processed by the data processing unit 4 in such a way that the display unit 2 now displays the pointer P' at position II of the displayed Internet page IS. A displacement of the pointer symbol P showing the selection information to P' is thus achieved in this way by displacing the recording unit 1 relative to the recorded background.

**[0030]** As was already described above, it is also possible to perform a swiveling instead of the vertical displacement of the mobile multimedia communication terminal from a position I to a position II, which enables the pointer symbol P to be displaced in the same manner to position II for the pointer symbol P'.



**[0031]** Mobile multimedia communication terminals, as illustrated by way of example in Figs. 3a and 3b, are especially advantageous if they are equipped as mobile videophones. Mobile videophones already have a large display unit 2 as well as a recording unit 1 for recording image information. Moreover, such mobile videophones already have an image compression device as image evaluation unit 3 for compressing the recorded image information. The algorithms used for image compression detect a movement in the image information A and A', with the movement of the total image information being calculated in such a way to produce a total or main motion vector which is equivalent to the movement or displacement of the mobile multimedia communication terminal MM or the associated image information A and A' respectively. This total or main motion vector, which can be readily calculated during image compression, can now be processed as control information with corresponding x, y and z components, and displace the selection information, i.e. the pointer symbols P or P', accordingly. Since the compression algorithms used are essentially already present in a mobile videophone, no additional costs are incurred. To switch over or activate/deactivate the input device, the mobile videophone or mobile multimedia communication terminal MM requires only an activation button T.

**[0032]** Fig. 4 shows a schematic diagram of a mobile multimedia communication terminal having an input device according to a second exemplary embodiment. In Fig. 4 the same reference symbols denote the same or corresponding components as in Figs. 3a and 3b, so a detailed description is dispensed with below.

**[0033]** On a mobile multimedia communication terminal MM having an input device according to the second exemplary embodiment, the display unit 2 does not display the complete Internet page IS, but only a selected section F. This way of displaying of information, for example from the Internet or from another application, has the advantage that the information on the displayed page IS is more readily legible for the user.

**[0034]** According to the second exemplary embodiment, the input device now has intuitive control of the information page IS to be displayed. To be more precise, a user need only displace the mobile multimedia communication terminal with the recording unit 1 in the x and y directions in order to reach the respective sections of the information page IS, so that the information page IS can be read intuitively (i.e. by displacing a viewing window) without using any further keys or input media.

**[0035]** In addition, a displacement in the z direction, i.e. a forward/backward movement of the mobile multimedia communication terminal MM, can enlarge or reduce the size of the selected section F, which enables intuitive use comparable to the use of a magnifying glass.

**[0036]** According to Figs. 3 and 4, the recording unit 1 is located on the front of the mobile multimedia communication terminal MM. It can however also be located on the rear of the terminal, or a second recording unit may be arranged on the rear of the mobile multimedia communication terminal MM. Given suitable realization of the optics, i.e. the ability to focus the recording unit 1 even at a very short distance, the mobile multimedia communication terminal MM can also be placed rear down on a suitably structured surface and the whole unit can be displaced in the same way as a mouse. The recording unit located on the rear detects here, as described above, the relative movement or relative displacement of the recorded image information (structured surface) and determines from it the corresponding control information for controlling the selection information, i.e. a pointer symbol P or a display section F of the information page IS. This results in the input device being particularly easy to operate, since it essentially corresponds to a mouse input device. In this case the mobile multimedia communication terminal preferably has the selection buttons (not shown) known from mouse input devices.

**[0037]** Figs. 5a to 5c show enlarged partial views of a mobile multimedia communication terminal MM having an input device according to a third exemplary embodiment. In Figs. 5a to 5c, the same reference symbols denote the same components as in Figs. 1 to 4, so a detailed description is dispensed with below.

**[0038]** According to Figs. 5a to 5c, the input device according to the third exemplary embodiment can be used in the same way as a so-called "touch-pad" input device. In Fig. 5a, reference numeral 1 again denotes a recording unit 1, but one which is a special macro camera system. To be more precise, the recording unit 1 according to Figs. 5a to 5c is able to record very fine structures in the immediate vicinity of the camera, by which, for example, the finger lines of a finger placed directly on the recording unit are recorded in sharp focus.

**[0039]** According to Figs. 5a to 5c, the display unit 2 shows a telephone directory list with a plurality of names and corresponding phone numbers. The telephone directory list displayed on the display unit 2 thus corresponds to an information page IS, with the selection information being represented neither by a pointer symbol P for indicating a selection position, nor by a display area F, but by a predetermined selection field B in the form of a, for example, colored

bar. To control the input, or to select the name Meier with phone number 345678, the user then places his finger on the recording unit 1, with the input device activated by the activation button T (not shown). According to Fig. 5b, the finger lines are now recorded as image information A, and the user moves his finger downward to displace the bar B. Fig. 5c shows here a partial view of the mobile multimedia communication terminal MM, with the finger shown at a lower position. The recording unit 1 accordingly detected a displacement of the recorded image information A → A' on the basis of the finger lines and evaluated this as a vertical displacement downward. The evaluation unit 3 accordingly outputs corresponding control information to the data processing unit 4, which results in the bar B being displaced downward on the display unit 2 and now highlighting the desired name Meier with phone number 345678.

**[0040]** To select the desired name, according to the third exemplary embodiment the input device can also have a pressure sensor for confirming the displayed selection information, i.e. the name highlighted by the bar B, which dispenses with the need for further fixed keys or so-called menu-driven "soft keys".

**[0041]** Given suitable dimensioning of the recording unit 1 and the evaluation unit 3, in this way it is also possible to make an input in a way known from "touch pads" and/or "touch screens" for example. The integration of a pressure sensor in the recording unit 1 further reduces the space required for the input device and enhances ease of operation. In comparison with known "touch pads" in particular, with the input device according to the third exemplary embodiment, it is not the main focus of a surface area which is determined, but rather the exact position or movement of the finger is tracked on the basis of the lines present on it. The precision of this input device is therefore much greater than that of known input devices. With the input device according to the third exemplary embodiment, therefore, essentially a relative macro displacement of the recorded image information is also used to control selection information.

**[0042]** A CCD or CMOS sensor camera is preferably used as the recording unit 1. The recording unit 1 is located here either on the front or on the rear of an input or computer system respectively, but it is not limited thereto and may also be arranged at a different position and be moved around, for example by mirrors, in the same or opposite direction to the display direction of the display unit 2.

**[0043]** The invention was described above with reference to a mobile multimedia communication terminal. It is however not limited thereto, and likewise encompasses ultra-small computer systems without a communication link, such as palmtop computers for example.

Likewise, the present invention may also be used on corded telecommunication terminals and other computer systems.

**[0044]** The invention has been described in detail with particular reference to preferred embodiments thereof and examples, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

from the prior art, the present invention provides a method for determining the position of a mobile station relative to a base station. The method comprises the steps of: receiving a signal from the mobile station; determining the position of the mobile station relative to the base station; and providing the position information to the base station.

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

Vorrichtung und Verfahren zur Eingabe  
von Steuerinformationen in  
Computersysteme

deren Beschreibung

(zutreffendes ankreuzen)

☐ hier beigefügt ist.

☒ am 26.06.2000 als

PCT internationale Anmeldung

PCT Anmeldungsnummer PCT/EP00/05917

eingereicht wurde und am \_\_\_\_\_

abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method and device for inputting control  
information in computer systems

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on 26.06.2000 as

PCT international application

PCT Application No. PCT/EP00/05917

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# German Language Declaration

Prior foreign applications

Priorität beansprucht

Priority Claimed

99112287.0

(Number)

(Nummer)

EP

(Country)

(Land)

25.06.1999

(Day Month Year Filed)

(Tag Monat Jahr eingereicht)

☒

Yes

Ja

☐

No

Nein

(Number)

(Nummer)

(Country)

(Land)

(Day Month Year Filed)

(Tag Monat Jahr eingereicht)

☐

Yes

Ja

☐

No

Nein

(Number)

(Nummer)

(Country)

(Land)

(Day Month Year Filed)

(Tag Monat Jahr eingereicht)

☐

Yes

Ja

☐

No

Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/EP00/05917

(Application Serial No.)

(Anmeldeseriennummer)

26.06.2000

(Filing Date D, M, Y)

(Anmeldedatum T, M, J)

anhängig

(Status)

(patentiert, anhängig, aufgegeben)

pending

(Status)

(patented, pending, abandoned)

(Application Serial No.)

(Anmeldeseriennummer)

(Filing Date D,M,Y)

(Anmeldedatum T, M; J)

(Status)

(patentiert, anhängig, aufgeben)

(Status)

(patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patenten gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

# German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint

Customer No. 21171

Telefongespräche bitte richten an:  
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. \_\_\_\_\_

Postanschrift:


Send Correspondence to:

Staas & Halsey LLP  
700 Eleventh Street NW, Suite 500 20001 Washington, DC  
Telephone: (001) 202 434 1500 and Facsimile (001) 202 434 1501  
or  
Customer No. 21171

Voller Name des einzigen oder ursprünglichen Erfinders: <b>GERHARD BOCK</b>		Full name of sole or first inventor: <b>GERHARD BOCK</b>	
Unterschrift des Erfinders <i>[Signature]</i>	Datum <b>21.11.01</b>	Inventor's signature	Date
Wohnsitz <b>KRAILLING, DEUTSCHLAND</b>		Residence <b>KRAILLING, GERMANY DEX</b>	
Staatsangehörigkeit <b>DE</b>		Citizenship <b>DE</b>	
Postanschrift <b>FRUEHLINGSTR. 19</b>		Post Office Address <b>FRUEHLINGSTR. 19</b>	
<b>82152 KRAILLING</b>		<b>82152 KRAILLING</b>	
Voller Name des zweiten Miterfinders (falls zutreffend): <b>CHRISTINE KOCOUREK</b>		Full name of second joint inventor, if any: <b>CHRISTINE KOCOUREK</b>	
Unterschrift des Erfinders <i>[Signature]</i>	Datum <b>5.1.02</b>	Second Inventor's signature	Date
Wohnsitz <b>MUENCHEN, DEUTSCHLAND</b>		Residence <b>MUENCHEN, GERMANY DEX</b>	
Staatsangehörigkeit <b>DE</b>		Citizenship <b>DE</b>	
Postanschrift <b>TRAUNREUTER STR. 30</b>		Post Office Address <b>TRAUNREUTER STR. 30</b>	
<b>81549 MUENCHEN</b>		<b>81549 MUENCHEN</b>	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Voller Name des dritten Miterfinders: <b>FRITZ SEYTTER</b>		Full name of third joint inventor: <b>FRITZ SEYTTER</b>	
Unterschrift des Erfinders 	Datum <b>18.12.01</b>	Inventor's signature	Date
Wohnsitz <b>MUENCHEN, DEUTSCHLAND</b>		Residence <b>MUENCHEN, GERMANY DEX</b>	
Staatsangehörigkeit <b>DE</b>		Citizenship <b>DE</b>	
Postanschrift <b>ASAMSTR. 12 C</b>		Post Office Address <b>ASAMSTR. 12 C</b>	
<b>81541 MUENCHEN</b>		<b>81541 MUENCHEN</b>	
Voller Name des vierten Miterfinders:		Full name of fourth joint inventor:	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	
Voller Name des fünften Miterfinders:		Full name of fifth joint inventor:	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	
Voller Name des sechsten Miterfinders:		Full name of sixth joint inventor:	
Unterschrift des Erfinders	Datum	Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).